

1

2/2 directional control seat valve 3/2 directional control seat valve NW3 and NW6 for water, oil, and air

max. 320 bar for plate mounting

Protection against accidental operation
Operating magnet protected against dirt and humidity

Application:

The valves are used for water or oil hydraulic control systems.
They can also be used as pilot-control valves.

Technical data:

Type:

Directional control ball seat valve

Connections:

Plate mounting with O-ring seal on request available with connection plate

Connection thread

NW3 = R1/4" or 1/4" NPT

NW6 = R3/8" or 3/8" NPT

Medium:

Water, oil or air must be specially mentioned when ordering

Viscosity:

1 to 300 cSt

Ambient temperature:

Depends on control element, see table "Technical data of control elements", higher temperatures on request

Seals:

NBR, other seal materials available upon request

Sealing:

Ball on seat

Pressure range:

0 to 320 bar (630 bar)

for 3/2 dir.:

The pressure in connection "R" must not exceed 50% of working pressure

Operating elements can each be rotated through 90°
Wear parts are easily accessible and can be replaced quickly

Switching time:

Depends on operating pressure and operating temperature (see table: technical data of control elements)

Fitted pos.:

Any

Flow direction:

2/2W: From "P" to "A"

3/2W: From "P" to "A" or from "A" to "R"

the connections "P", "A", and "R" must not be mixed up

Flow rate for liquids:

Max. 20l/min at NW6

Max. 5l/min at NW3

Materials:

All parts coming into contact with the flow medium are made of corrosion resistant materials

Operating modes:

Electric, hydraulic, pneumatic, mechanical or manual operation

Special features:

The valve is characterized by fast response times. The solenoid plunger of the electromagnet is dual-supported and thus protected against wear. By means of a diaphragm seal between the pushrod and the solenoid plunger chamber the control electromagnet is protected against dirt and humidity. The arrestable manual operation device can be accessed by removing the type plate and is thus also protected against any accidental operation. The electric magnet and all other control elements can each be rotated through 90°. All wear parts are easily accessible and quick to replace



Valve version “positive”

(Valve is closed when magnet is de-energized)
Fig. 1 (electromagnet de-energized):
The pressure spring (2) presses the valve ball (4) via pushrod (3) into the valve seat (5). The pressure of the medium in infeed “P” supports the pressure spring action (2). Thus the passage from infeed “P” to working line “A” is blocked.
Fig. 2 (electromagnet energized):
When the electromagnet (1) is switched on, the solenoid plunger (6) presses the valve ball (4) - via lever (7) and pushrod (8), and against the force of the pressure spring (2) and the pressure of the medium in the infeed “P” - from its valve seat (5). Now the passage from infeed “P” to working line “A” is clear.

Valve version “negative”

(Valve is open when magnet is de-energized)
Fig. 1 (electromagnet de-energized):
The pressure spring (2) lifts the valve ball (4) via pushrod (3) from the valve seat (5). Thus the passage from infeed “P” to working line “A” is clear.
Fig. 2 (electromagnet energized):
When the electromagnet (1) is switched on, the solenoid plunger (6) presses the valve ball (4) - via lever (7) and pushrod (8), and against the force of the pressure spring (2) and the pressure of the medium in the infeed “P” - into the valve seat (5). Now the passage from infeed “P” to working line “A” is blocked.

electromagnet de-energized electromagnet energized

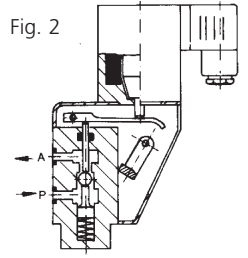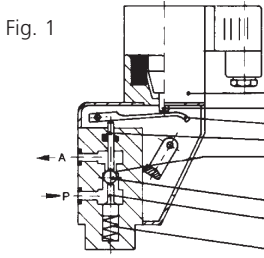

A working line

B infeed

1 electromagnet

2 pressure spring

3 pushrod



4 valve ball

5 valve seat

6 solenoid plunger

7 lever

8 pushrod

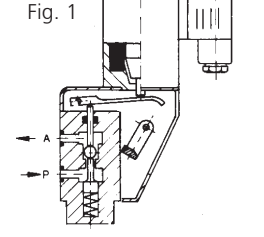

A working line

B infeed

1 electromagnet

2 pressure spring

3 pushrod











4 valve ball

5 valve seat


6 solenoid plunger

7 lever

8 pushrod


Type and order example:		
Operating modes	Symbol	Type: NW 3
Electromagnetic Example for 24 volts		2/2KSV-03P-25NBNNN-ED024 * 2/2KSV-03N-25NBNNN-ED024 **
Hydraulic		2/2KSV-03P-25NBGNN-Z320 * 2/2KSV-03N-25NBGNN-Z320 **
Pneumatic		2/2 KSV-03P-25NBGNN-Z064 * 2/2 KSV-03N-25NBGNN-Z064 **
Mechanical (roller)		2/2KSV-03P-25NBGNN-RO * 2/2KSV-03N-25NBGNN-RO **
Manual		2/2KSV-03P-25NBGNN-MAN * 2/2KSV-03N-25NBGNN-MAN **
Type: NW 6		
Electromagnetic Example for 24 volts		2/2KSV-06P-25NBNNN-ED024 * 2/2KSV-06N-25NBNNN-ED024 **
Hydraulic		2/2KSV-06P-25NBGNN-Z320 * 2/2KSV-06N-25NBGNN-Z320 **
Pneumatic		2/2 KSV-06P-25NBGNN-Z064 * 2/2 KSV-06N-25NBGNN-Z064 **
Mechanical (roller)		2/2KSV-06P-25NBGNN-RO * 2/2KSV-06N-25NBGNN-RO **
Manual		2/2KSV-06P-25NBGNN-MAN * 2/2KSV-06N-25NBGNN-MAN **

dimensional drawing
dimensions shown outside brackets DN 6
dimensions shown in brackets DN 3

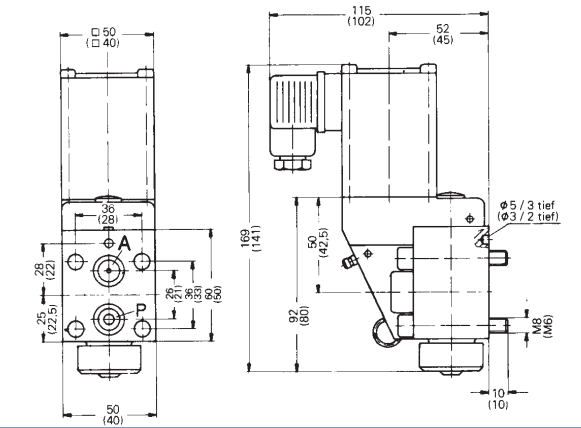

* Version “positive” = closed de-energized

** Version “ ” = open de-energized



	NW3 infeed + working line	NW6 infeed + working line
connection bore	3 mm	6 mm
O-ring	9,25*1,78	12*2,5

Valve version “positive”

(Valve passage from "P" to "A" is closed when magnet is de-energized)

Fig. 1 (electromagnet de-energized):

The medium fed in via infeed "P" presses the valve ball (4) into the valve seat (5), supported by the pressure spring (2). Thus the passage from infeed "P" to working line "A" is blocked.

Fig. 2 (electromagnet energized):

When the electromagnet (1) is switched on, the solenoid plunger (8) presses the valve ball (6) - via lever (9) and pushrod (10), and against the force of the pressure spring (2) - into the valve seat (7). Now drain "R" is blocked. At the same time, using the spacer pin (3), the valve ball (4) is pressed out of the valve seat (5), so that the passage from infeed "P" to working line "A" is now clear.

Valve version “negative”


(Valve passage from "P" to "A" is open when the magnet is de-energized) fig. 1 (electromagnet de-energized)

The pressure spring (2) lifts the valve ball (4) via pushrod (11) into valve seat (5). The medium flowing from infeed "P" to the working line "A" supports the pressure spring action. Thus the drain "R" is blocked and the infeed "P" is connected to the working line "A".

Fig. 2 (electromagnet energized)

When the electromagnet (1) is switched on, the solenoid plunger (8) presses the valve ball (4) - via lever (9) and pushrod (10) and against the force of the pressure spring (2) and the pressure of the medium in the infeed "P" - into the valve seat (7). Now the infeed "P" is blocked and the working line "A" is connected to drain "R".


electromagnet de-energized electromagnet energized

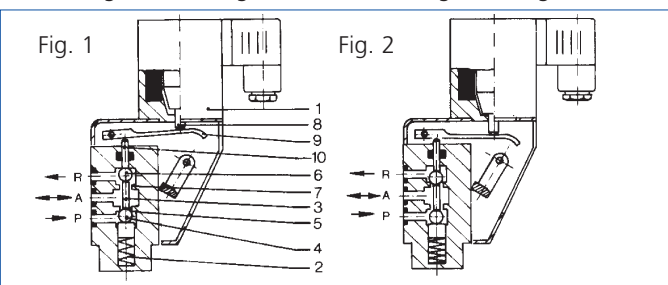

- P = infeed
A = working line
R = return

1 electromagnet
2 pressure spring
3 spacer pin
4 valve ball
5 valve seat

6 valve ball
7 valve seat
8 solenoid plunger
9 lever
10 + 11 pushrod

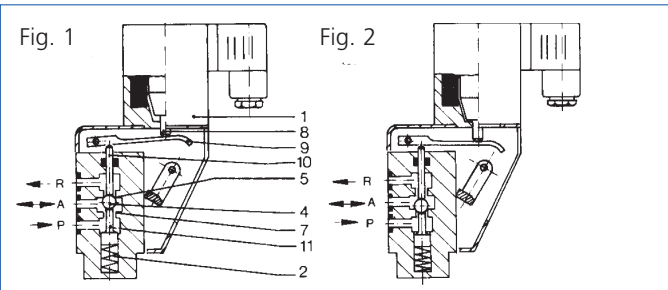











- P = infeed
A = working line
R = return


1 electromagnet
2 pressure spring
3 spacer pin
4 valve ball
5 valve seat

6 valve ball
7 valve seat
8 solenoid plunger
9 lever
10 + 11 pushrod

dimensional drawing DN 3 and DN 6
DN 3 dimensions shown in brackets


P = infeed
A = working line
R = return

Type and order example:		
Operating modes	Symbol	Type: NW 3
Electromagnetic Example for 24 volts		3/2KSV-03P-25NBNNN-ED024 * 3/2KSV-03N-25NBNNN-ED024 **
Hydraulic		3/2KSV-03P-25NBGNN-Z320 * 3/2KSV-03N-25NBGNN-Z320 **
Pneumatic		3/2 KSV-03P-25NBGNN-Z064 * 3/2 KSV-03N-25NBGNN-Z064 **
Mechanical (roller)		3/2KSV-03P-25NBGNN-RO * 3/2KSV-03N-25NBGNN-RO **
Manual		3/2KSV-03P-25NBGNN-MAN * 3/2KSV-03N-25NBGNN-MAN **
Type: NW 6		
Electromagnetic Example for 24 volts		3/2KSV-06P-25NBNNN-ED024 * 3/2KSV-06N-25NBNNN-ED024 **
Hydraulic		3/2KSV-06P-25NBGNN-Z320 * 3/2KSV-06N-25NBGNN-Z320 **
Pneumatic		3/2 KSV-06P-25NBGNN-Z064 * 3/2 KSV-06N-25NBGNN-Z064 **
Mechanical (roller)		3/2KSV-06P-25NBGNN-RO * 3/2KSV-06N-25NBGNN-RO **
Manual		3/2KSV-06P-25NBGNN-MAN * 3/2KSV-06N-25NBGNN-MAN **

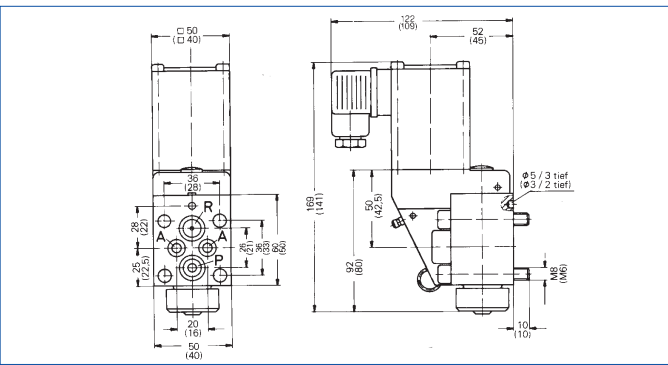

* Version “positive” = closed de-energized


** Version “ ” = open de-energized



	NW 3			NW 6		
	P	R	A	P	R	A
connection bore	Ø3	Ø3	Ø3	Ø3	Ø3	Ø3
O-ring	9,25 1,78	9,25 1,78	6,07 1,78	12-2,5	12-2,5	8-2



Valve body with console

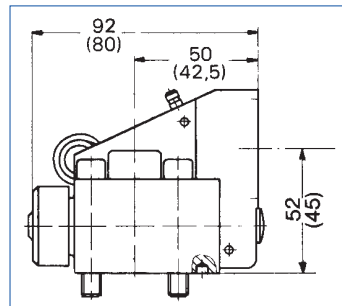


Hydraulic and pneumatic operation


Pressure range:

Pneumatic 2,5-64 bar


Hydraulic 2,5-64 bar
22-320 bar

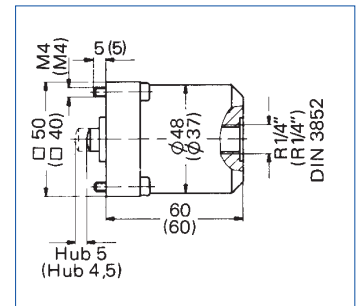

Mechanical operation

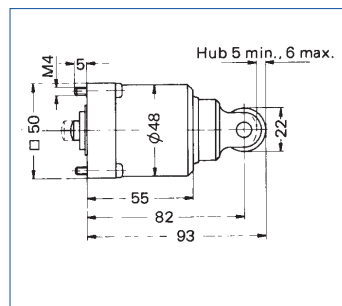

Manual
operation

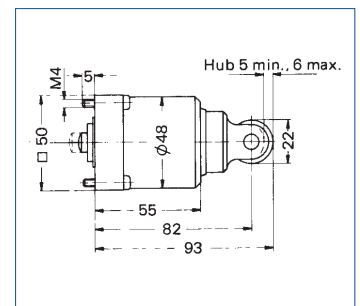

Electromagnetic operation NW3 and NW6, fire-damp-proof and explosion-proof

type dE4 (NW3) and dE3 (NW6), protection class acc.
to VDE 0170/0171

NW3:

(Sch)d/(Ex)d2 G4 certificate No.T5681/BVS

NW6:

(Sch)d/(Ex)d2 G5 certificate No.T5538/BVS



NW3/Pg 16 DIN 22419 available for voltages from 12 - 240 V
direct and alternating current.

power consumption:
up to approx. 20 Watt

connection cable:
12,5 - 14 mm (A15) NW6/Pg 21 DIN 22419 available for vol-
tages from 24 - 500 V direct and alternating current.

power consumption:
up to approx. 32 Watt

connection cable:
15 - 19 mm (A19)

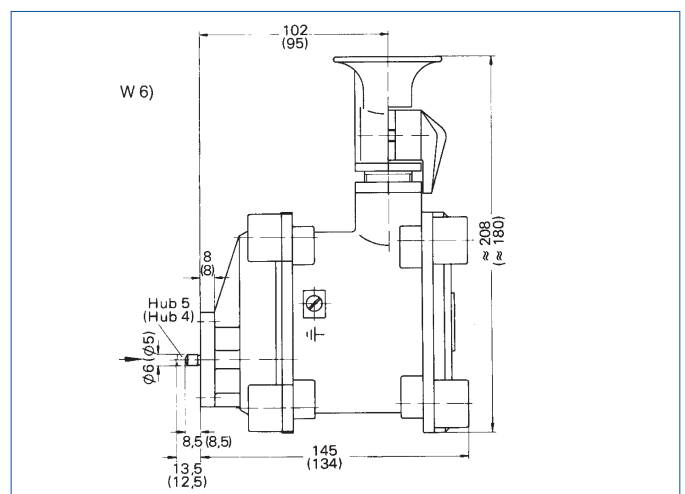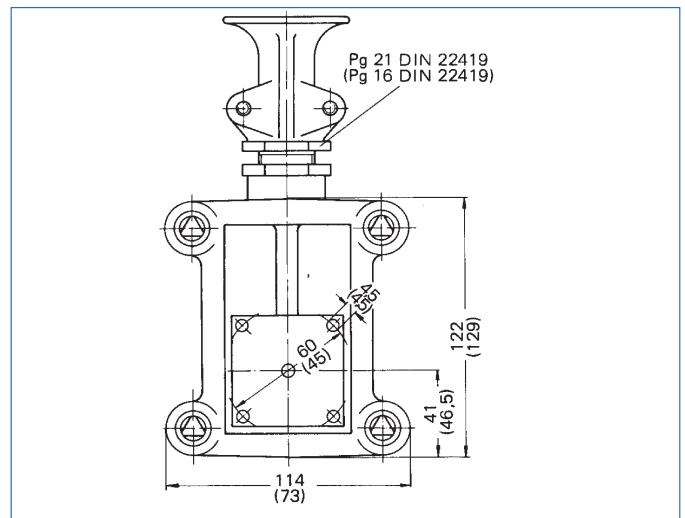



actuator	NW 3						
design type	electromagnet				hydraulic our pneumatic cylinder		roller actuation
			dE 4	dE 4	Zyl. 31295	Zyl. 31887	mech.
protection class housing	IP 54 DIN 40050	IP 54 DIN 40050	(Sch)d/(EX)d2G4 VDE 170/0171	(Sch)d/(EX)d2G4 VDE 170/0171			
protection class connection compartment			(Sch)e/(Ex)e VDE 0170/0171 IP 54 DIN 40050	(Sch)e/(Ex)e VDE 0170/0171 IP 54 DIN 40050			
connection typ	plug	plug	terminal	terminal	thread R1/4"	thread R1/4"	
control medium					oil in water emulsion, compressed air and neutral gases	oil in water emulsion,	
medium temperature					- 30° C to + 110° C	- 30° C to + 110° C	
ambient temperature	max. +35°C	max. +35°C	max. +40°C	max. +40°C	max. +80°C	max. +80°C	max. +80°C
pressure range					2,5-64 bar	25-320 bar	
mounting position	any	any	any	any	any	any	any
operating voltage*	24 V=	220 V ~	24 V=	220 V ~			
current intensity	0,54 A	0,65 A	0,54 A	0,65 A			
switch-on period	100% ED	100% ED	100% ED	100% ED			
pull-in power	13 W	13 W	13 W	13 W			
hold performance	13 W	13 W	13 W	13 W			
on period (100bar)							
off period							
lifting force	31 N	26 N	31 N	26 N			

* Other voltages possible

Connection plate 2/2 way NW 3 and NW 6

Dimensions in brackets NW 3

